

Solar-Trac™

Highest level of quality for tomorrow's energy



OmegaFlex®

**proudly introduces
Solar-Trac™**

Flexible supply and return lines
for solar heated water systems.



OmegaFlex[®] introduces Solar-Trac[™]

OmegaFlex[®] proudly introduces Solar-Trac[™] flexible stainless steel tubing for residential and commercial solar heated domestic hot water systems. Solar-Trac is made from 316L corrugated stainless steel and comes in insulated or un-insulated supply and return lines. Coupled with Solar-Flare[™] self-flaring fittings, Solar-Trac offers installers the highest levels of quality and ease of installation for tomorrow's energy needs.

Solar-Trac Insulated and Un-insulated Flexible SST Piping (T316L Corrugated Stainless Steel)					
	Sizes	Max Temp	Reel Lengths	Max Pressure	R-Value
Un-Insulated	3/8" - 2"	300°F	200 Ft.	3/8"-1"/125 Psig 1 1/4"-2"/55 Psig	
Insulated	3/8" - 1 1/4"	300°F	100 Ft.	3/8"-1"/125 Psig 1 1/4"-2"/55 Psig	5 5

	Sizes	End Connection
Solar-Flare Fittings	3/8" - 2"	NPT

*Additional lengths, fittings, couplings and accessories available




Solar-Trac Piping Benefits:

- T316L Stainless Steel
- Available sizes from 3/8" thru 2"
- Tubing bends by hand
- Routes easily around obstacles
- Cuts using standard tubing cutter
- Special lengths available



Solar-Flare Fitting Benefits:

- Self-flaring
- No special tools
- Reliable metal-to-metal sealing surface
- No gaskets or rubber washers

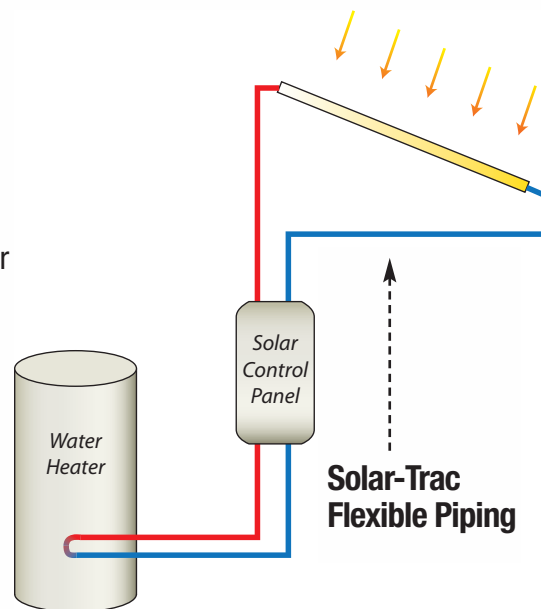

For more information and pricing, call **1-800-355-1039**
or email solar-trac@omegaflex.net